


# IM R 13 T

ATRIUM LIFT TELESCOPIC

OUTDOOR AND INDOOR

## STANDARD EQUIPMENT

- Automatic outrigger leveling system
- 120V, 15 amp electric motor
- Air / Water outlet in the platform basket
- 120V AC power to platform
- Removable wireless control box
- Tether for wired connectivity
- Emergency hand pump
- Cylinder holding valve
- Hour meter
- Load and tip detection sensor
- Load cell
- Hydraulic jib
- Rubber tracks
- Remote battery charger
- Removable basket with 1 pin detach
- Overload sensor
- 120V battery charger
- Proportional controls with diagnostics
- Honda GX390 Engine

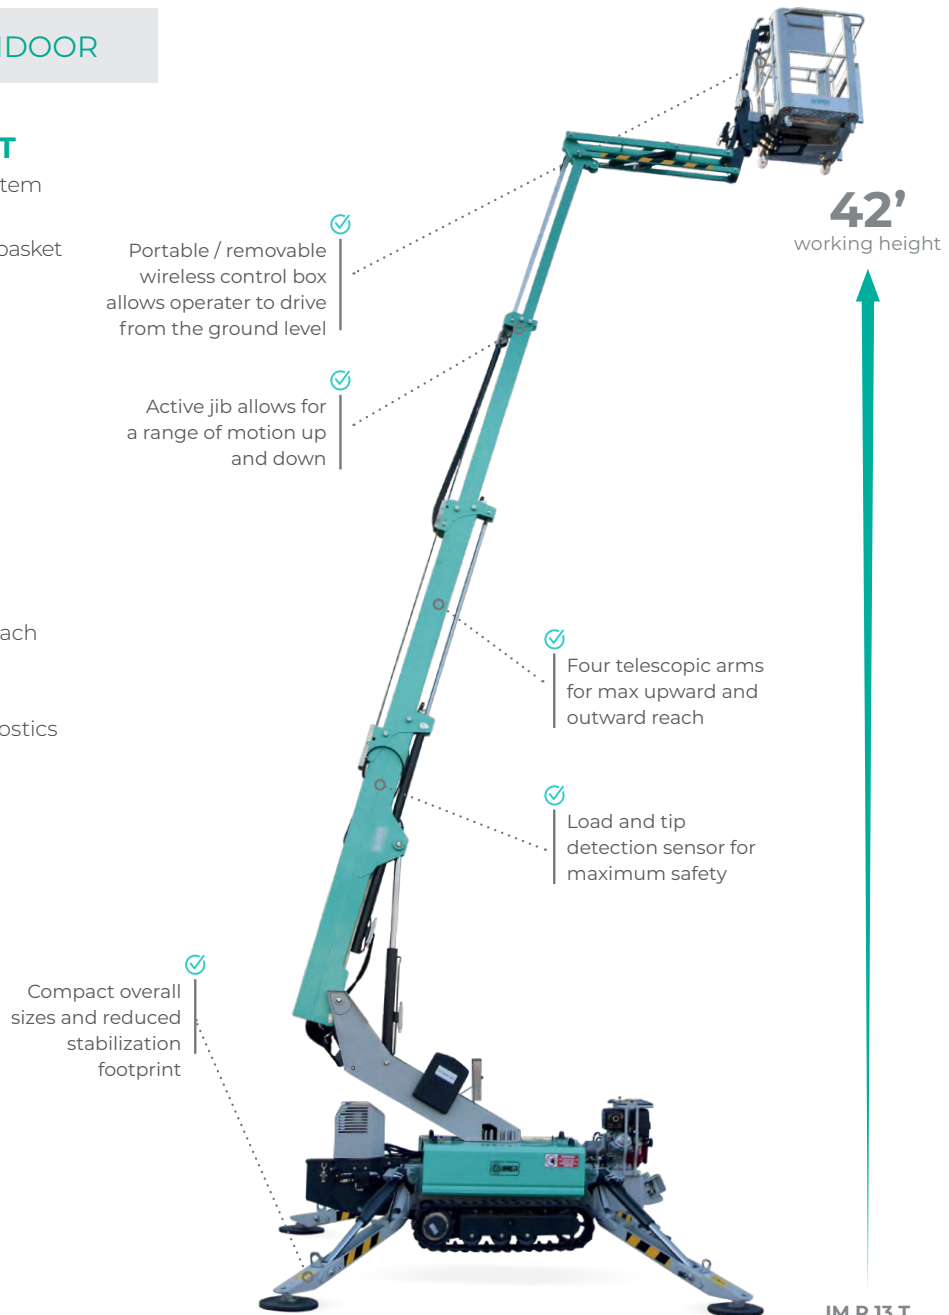

## OPTIONAL EQUIPMENT

- Non-marking rubber tracks
- Working light in the platform basket
- 12 V emergency pump
- 120 V desktop remote charge
- Sliding, oversized outrigger shoes
- Oversized outrigger pads
- Double speed traction
- Aluminium basket (2' 11-1/2" x 2' 5")
- Aluminium basket (4' 7" x 2' 3-1/2")
- IMERVIEW GPS Remote Monitor System

IM R 13		
Model #	1128728	
Working height	42'	13 m
Platform height	36'	11 m
Side outreach (weight in basket)	17' / 510 lb - 20' 6" / 308 lb	5.25 m / 320 kg - 6.3m / 140 kg
Rotation (non-continuous)		355°
Basket dimensions	51" x 28" x 43"	1300 x 750 x 1100 mm
Transport length (without basket)	12' 4" (9' 8")	3780 mm (3000 mm)
Transport width (without basket)	4' 3" (2' 6")	1300 mm (790 mm)
Height in stowed position (w/ stabilizers)	6' 6 3/4"	2000 mm
Overall outrigger footprint	8' 8" / 9' 2"	2700 x 2800 mm
Driving speed	.93 mph	1.5 km/h
Gradeability		30%
Platform capacity	510 lbs	230 kgs
Aux. Electric motor	120 V / 1.5 hp	120 V / 1.125 kW
Honda GX390	13 hp	9.7 kW
Machine weight	3410 lbs	1550 kg

IM R 13 T



Thermal-magnetic switch panel and power line inlet.



Easily attach or remove the basket with the one-pin mounting system.



Rugged engine guard for improved protection.

